




SERVICE TECH, INC.

Activated Carbon Engineering, Sales and Service

LIQUIDCLEAN - HP 500 500 POUND HIGH PRESSURE ACTIVATED CARBON ADSORBER

STANDARD FEATURES

- * 500#S of virgin activated carbon, coal base, 8x30 mesh.
- * Standard 2"FNPT couplings for easy installation.
- * Heavy duty, corrosion resistant *Polyglass^R* composite poly vessel
- * Hub & lateral internal distribution and collection assemblies designed to maximize flow & carbon utilization.
- * High pressure vessel rated to 150 psig operation @ 150°F.

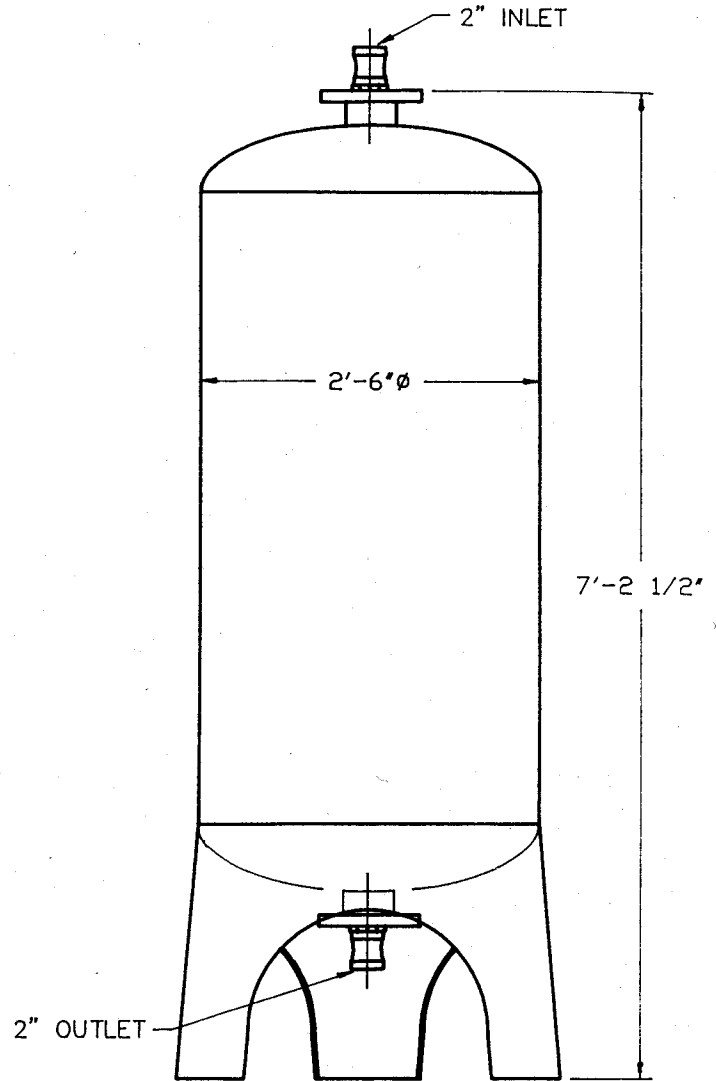


SPECIFICATIONS

Max Suggested Flow	- 25 GPM
Typical Flows	- 5 to 15 GPM
Inlet	- 2" fnpt
Outlet	- 2" fnpt
Max Operating Temperature	- 150°F
Max Operating Pressure	- 150 psi max. operating pressure

* Based on (2) units operating in series and may not be effective in all applications.

SERVICE TECH 500 HP & IRONMASTER 450 HP
PRESSURE DROP CURVE

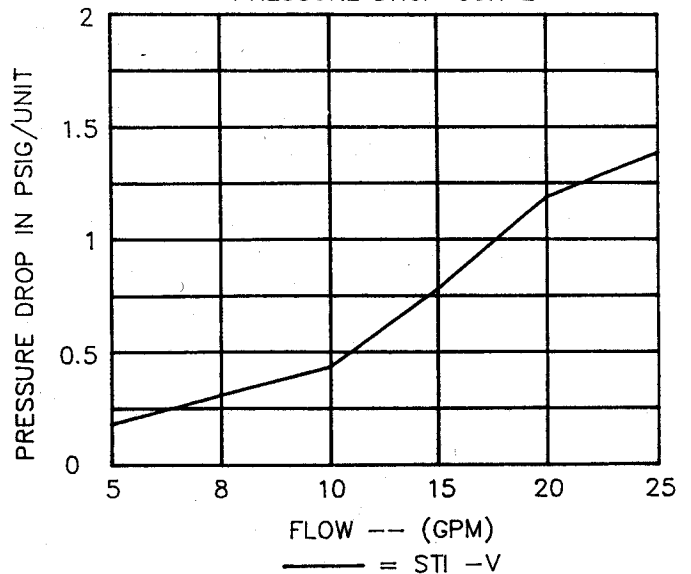

(508) 673-9784 • Toll Free (800) 368-0043 • Fax (508) 673-6151

• Mailing: P.O. Box 8093, Cranston, RI 02920 • Sales & Distribution: 1658 G.A.R. Highway, Swansea, MA 02777 • Warehouse & Manufacturing: 1980 Fall River Avenue, Seekonk, MA 02771