



SERVICE TECH, INC.

Activated Carbon Engineering, Sales and Service

S-1 AIRCLEAN 200 POUND ACTIVATED CARBON AIR PURIFICATION ADSORBER


The SERVICE TECH S-1 (air)
Canister handles up to 150 CFM

FEATURES


- * 200 Pounds of high activity carbon.
- * Epoxy lined steel or polyethylene construction.
- * DOT rated. Acceptable for shipment of hazardous spent carbon.
- * Side drain for removal of accumulated condensate.
- * Low pressure drop.
- * PVC Internal piping.
- * High Temperature (180°F) steel units available.

APPLICATIONS

- * Soil Vapor Extraction
- * Air Stripper Polishing
- * Welding Areas
- * Tank Vents
- * Sewer Odor Control
- * Printing Operations

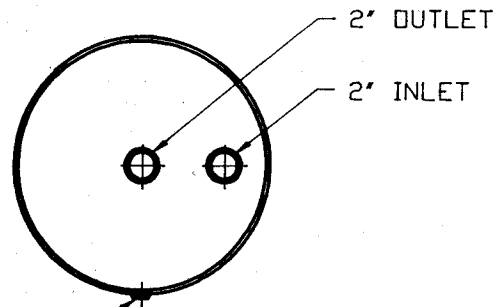

DRAIN CONNECTION
2" BUNG & PLUG

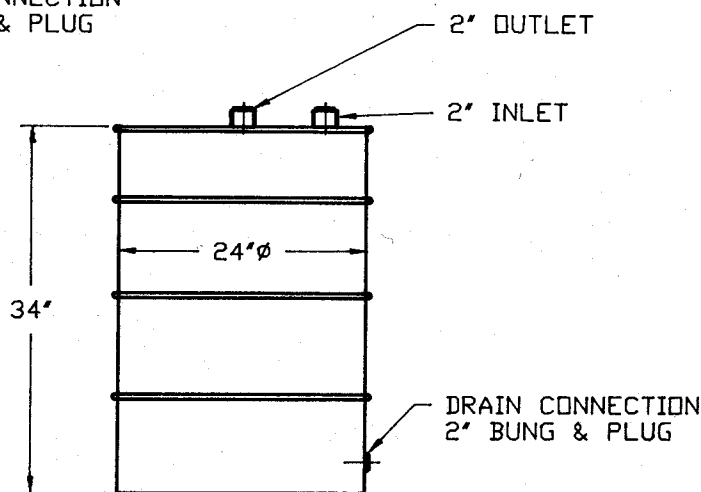


SPECIFY : POLYTHYLENE (P) OR DOUBLE EPOXY LINED STEEL (S)

SPECIFICATIONS

Container	- 24" dia/ x 34" hgt. - (D) double epoxy lined steel - (S) high density polythylene
Carbon	- 200 lbs. virgin high activity carbon
Max. Suggested Flow	- 100 CFM
Max. Rated Flow	- 150 CFM
Shipping Weight	- 250 lbs.
Inlet	- 2" fpt
Outlet	- 2" fpt
Drain	- 2" Bung

SERVICE TECH S-1
PRESSURE DROP CURVE

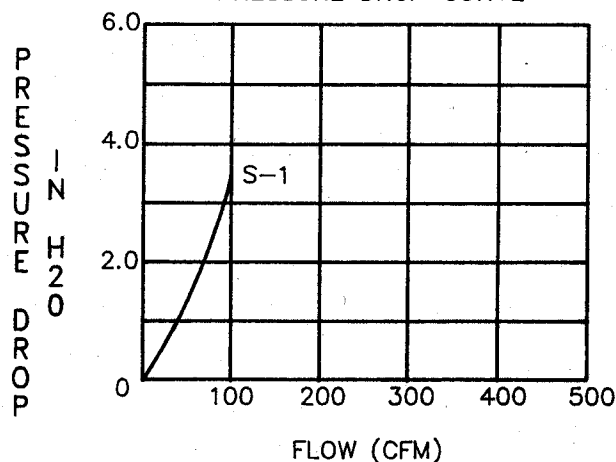

(508) 673-9784 • Toll Free (800) 368-0043 • Fax (508) 673-6151

• Mailing: P.O. Box 8093, Cranston, RI 02920 • Sales & Distribution: 1658 G.A.R. Highway, Swansea, MA 02777 • Warehouse & Manufacturing: 1980 Fall River Avenue, Seekonk, MA 02771