



**S-1000**  
**S-2000**

**AIRCLEAN ACTIVATED  
CARBON ADSORBERS**

The S-1000 and S-2000 are similar to their liquid counterparts in that they are low in cost and extremely efficient activated carbon vapor purification adsorbers. The intelligent choice.

**DESIGN SPECIFICATIONS**

MODEL	LBS. CARBON	MAXIMUM FLOW RATE	DIMENSIONS DIA. X HT.	INLET/OUTLET	BED DEPTH
S-1000	1,000	500 CFM	45.5" x 66.5"	4"	3.3'
S-2000	2,000	500 CFM	45.5" x 90"	4"	6.5'

**FEATURES**

Low pressure drop @ 400 CFM

S-1000 6" H<sub>2</sub>O

S-2000 9" H<sub>2</sub>O

Easy on-site changeout capability by STI

2" Condensate drain


12 psi max pressure

Fork channels for easy mobility

Epoxy phenolic interior lining, epoxy exterior coating (gray)

Filled with virgin 4 x 10 GAC, min 65 CTC

**S-2000**

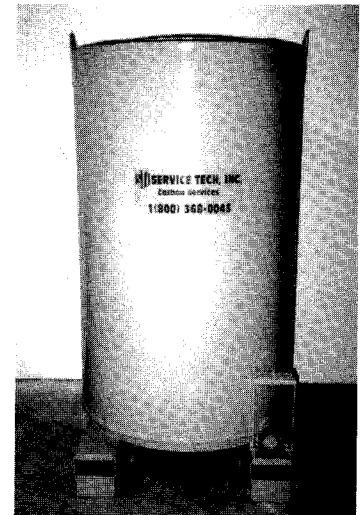

**S-1000**

